



# CLIO 2

Type

**XBX X**

Fabrication cut-offs

**Until 30 April 2001**

*fitted with front fog lights*

**Cancels and replaces Technical Note no. 809A dated July 2001**  
**Modifications:** replacement parts.

80B

## WATER IN THE FRONT FOG LIGHTS

- Engine: **XXX**
- Gearbox: **XXX**

Basic manual:  
Workshop Repair Manual: **337**

### CUSTOMER COMPLAINT

- Water in the front fog lights.

### POSSIBLE CAUSE

- Sealing of the fog light wiring.

### FAULT FINDING

- Confirm the customer complaint.

### CLAIM COMPLETION AND CODING

#### Destination of removed parts:

- As per Warranty Policy and Procedures Manual.

- **Without PG&CS**  
**NITG code:** **E25M**
- **With PG&CS**  
**Catalogue function:** **217**  
**Cause reference:** **82 00 164 962**
- **With or without PG&CS**  
**Supplier code:** **Y58**  
**Customer complaint code:** **4A**

Operation code	Title	Time allowed (in hours)
5213	Removing/refitting front bumper	0.8
8999	Replacing fog light wiring	0.5
	<b>TOTAL</b>	<b>1.3</b>

"The repair methods given by the manufacturer in this document are based on the technical specifications current when it was prepared.

The methods may be modified as a result of changes introduced by the manufacturer in the production of the various component units and accessories from which his vehicles are constructed."

All copyrights reserved by Renault.

Copying or translating, in part or in full, of this document or use of the service part reference numbering system is forbidden without the prior written authority of Renault.

### AFTER-SALES SOLUTION

#### Operation to be carried out:

- Replace the fog light wiring.
- Fit two cover masks.

#### Vehicles concerned:

- All CLIO 2s fitted with front fog lights.

#### When to take action:

- Upon receipt of a customer complaint.

#### Parts required:

- 1 fog light wiring **Part No.: 82 00 164 962**
- 2 fog light cover masks **Part No.: 82 00 130 905**

#### Tooling required:

- Conventional.

#### Description of the operation:

- Put the vehicle on a two-post lift.
- Remove the front bumper.
- Replace the fog light wiring.
- Attach the fog light cover masks (A) (**Fig. 1**) using the fog light lower mounting bolt (B) (**Fig. 1**).
- Refit the front bumper.
- Adjust the fog lights.

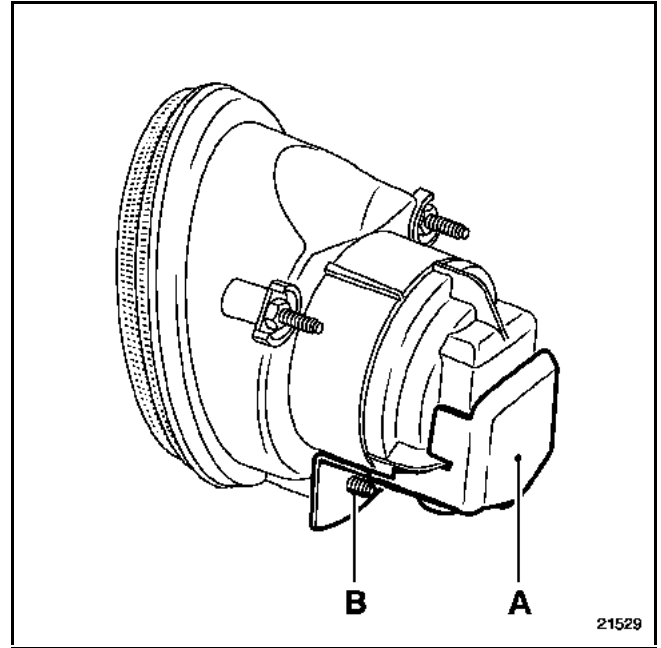


Fig. 1

A – Fog light cover mask

B – Fog light lower mounting bolt